

## Quadro



### Features

- High reliability LEDs
- Power supply included, non flicker ~100Hz
- High quality aluminum slim body (RAL9003)
- Instant start
- Driver external 950mA / DC38V
- CRI Ra>85
- Documents: CE, RoHS, EMC, LVD test report


### Applications

- Rooms lighting
- Hallways lighting
- Offices lighting
- Warehouses lighting
- Factory lighting

### Technical specifications

Available colors	warm white   white   cool white
Color temperature, K	~3000K   ~4200K   ~6000K
Power consumption, W	36 W
Typical luminous flux, lm	3900 Lm   4320 Lm   4450 Lm
LED Type	Epistar /SAMSUNG LED
Dimensions, mm	595 x 595 x 10,4
Protection class	IP44
Color rendering index	RA>85

### Light curves

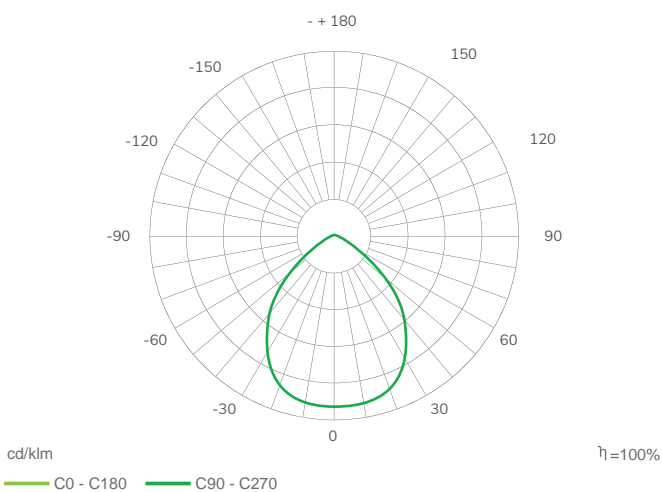

### Technical drawing

