

Features

- High reliability LEDs
- High luminous efficiency 150LM/W
- Color rendering index - Ra>80
- Emergency battery is optional
- Extremely strong aluminum body
- Water-proof, Dust-proof, Damp-proof
- Through-wiring 3x1.5mm² or 5x1.5mm²
- Stainless steel mounting brackets
- Easy installation
- IK-08


Applications

- Food industry lighting
- Animal husbandry lighting

Technical specifications

Color temperature, K	~4000K
Power, W	20W 50W 60W
Luminous efficacy	150lm/w
Length, mm	600 mm 1200mm 1500 mm
Protection class	Extremely resistant against chemically aggressive environment. It is resistant to ammonia and corrosive substances. Light fitting is specially designed for animal husbandry.

Light curves

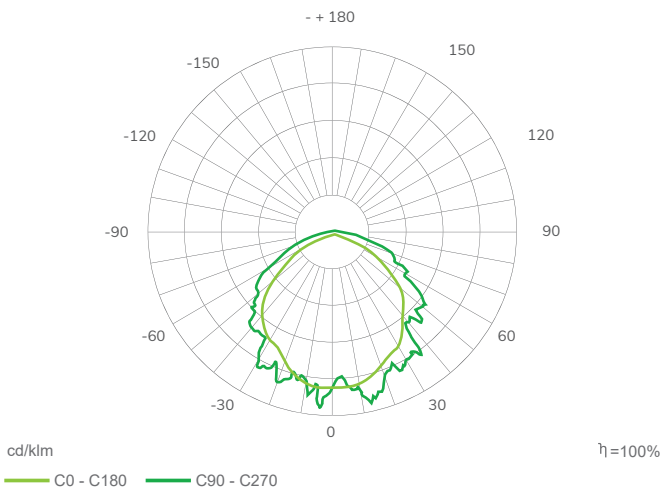

Technical drawing

