
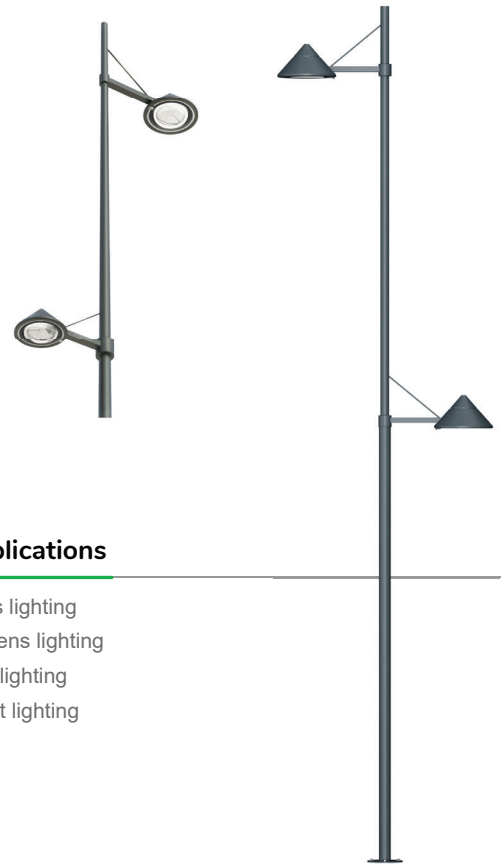


Elim



Features

- Made of aluminum, polyester powder coated with optional finishes and various RAL colors, silicon gasket, and tempered glass or polycarbonate diffusers and tempered glass diffuser.
- CRI>70
- Class I Electrical Protection
- Surge protection (optional): 2kv-6kV
- Polyester Powder Coating finish available in RAL Colors

Applications

- Parks lighting
- Gardens lighting
- Area lighting
- Street lighting

Available types

Product Item	Power consumption, W	Color temperature, K	Lumen Output
SL-E-60W-3000K 4000K	60W	3000K 4000K	6258 6453 lm
SL-E-90W-3000K 4000K	90W	3000K 4000K	9477 9769 lm
SL-E-120W-3000K 4000K	120W	3000K 4000K	12636 13026 lm

Technical specification

LED light source:	220-240V (50-60Hz)
Operating temperature:	-25°C /+55°C
Control System:	1-10V optional
Power factor:	> 95
Pole top mount or pole side mount:	Ø 60mm spigots tiltable
Dimensions:	300 x 10.000 x 1800 x 6000 mm

Technical drawing

