

Hildec




Features

- Pole made of structural aluminum extrusion profile, die cast floodlights, polyester powder coated with optional finishes and various RAL colors.
- CRI>70
- Class I Electrical Protection
- Flage cover optional
- Surge protection (optional): 2kv-6kV
- Polyester Powder Coating finish available in RAL Colors

Applications

- Parks lighting
- Gardens lighting
- Area lighting

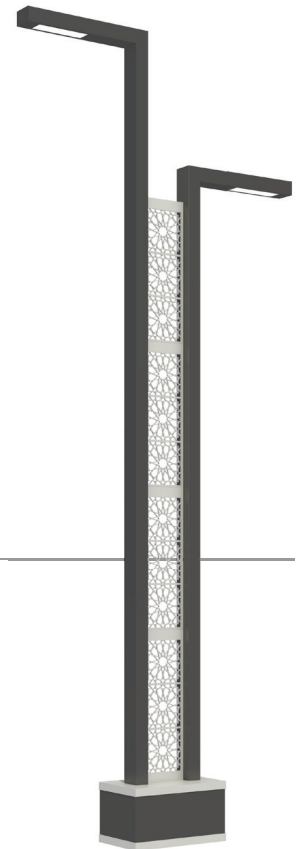

Available types

Product Item	Power consumption, W	Color temperature, K	Lumen Output
AL-H-35W-3000K 4000K	35W	3000K 4000K	4025 4137 lm
AL-H-60W-3000K 4000K	60W	3000K 4000K	6900 7092 lm
AL-H-100W-3000K 4000K	100W	3000K 4000K	11500 11820 lm

Technical specification

LED light source:	220-240V (50-60Hz)
Operating temperature:	-25°C /+55°C
Control System:	1-10V optional
Power factor:	>95
Dimensions:	605 x 3700 mm 1770 x 4500mm

Technical drawing

