


Nour

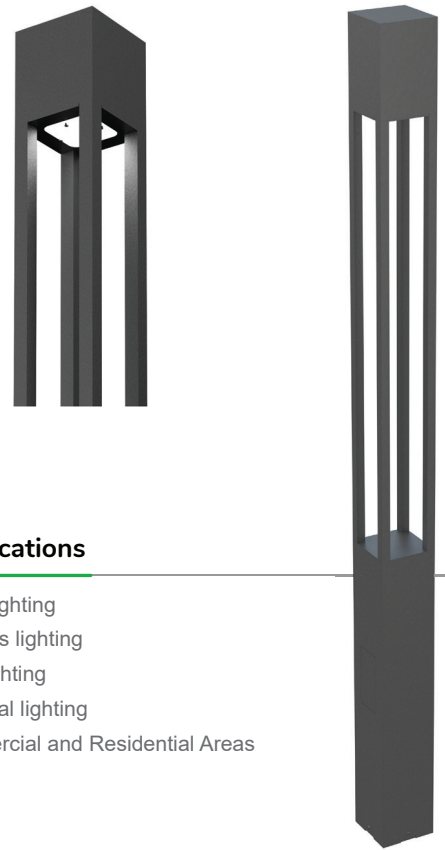

Features

- Pole made of structural aluminum extrusion profile, die cast floodlights, polyester powder coated with optional finishes and various RAL colors.
- CRI>70
- Class I Electrical Protection
- Flage cover optional
- Surge protection (optional): 2kv-6kV
- Polyester Powder Coating finish available in RAL Colors

Applications

- Parks lighting
- Gardens lighting
- Area lighting
- Industrial lighting
- Commercial and Residential Areas

Available types

Product Item	Power consumption, W	Color temperature, K	Lumen Output
CRA-N-30W-3000K 4000K	30W	3000K 4000K	3129 3225 lm
CRA-N-40W-3000K 4000K	40W	3000K 4000K	4172 4300 lm
CRA-N-50W-3000K 4000K	50W	3000K 4000K	5215 5375 lm
CRA-N-60W-3000K 4000K	60W	3000K 4000K	6258 6453 lm

Technical specification

LED light source:	220-240V (50-60Hz)
Operating temperature:	-25°C /+55°C
Control System:	1-10V optional
Power factor:	>95
Dimensions:	200 x 200mm 250 x 3000 mm

Technical drawing

