

## Skylla




### Features

- Pole made of structural aluminum extrusion profile, die cast floodlights, polyester powder coated with optional finishes and various RAL colors.
- CRI>70
- Class I Electrical Protection
- Flange cover optional
- Surge protection (optional): 2kv-6kV
- Polyester Powder Coating finish available in RAL Colors

### Applications

- Parks lighting
- Gardens lighting
- Area lighting

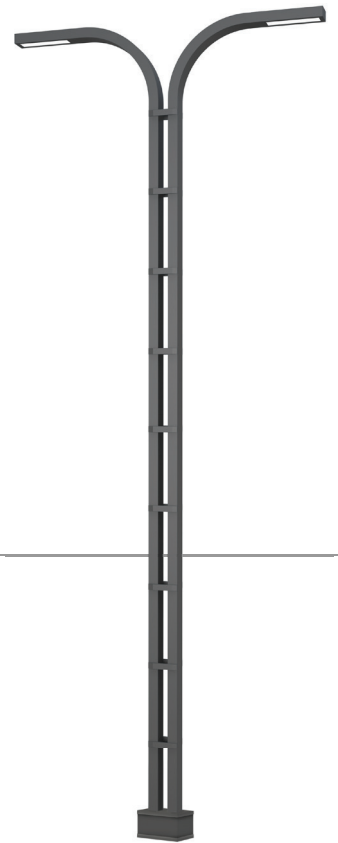


### Available types

Product Item	Power consumption, W	Color temperature, K	Lumen Output
AL-S-35W-3000K 4000K	35W	3000K   4000K	4025   4137 lm
AL-S-60W-3000K 4000K	60W	3000K   4000K	6900   7092 lm
AL-S-100W-3000K 4000K	100W	3000K   4000K	11500   11820 lm
AL-S-120W-3000K 4000K	120W	3000K   4000K	14400   14784 lm

### Technical specification

LED light source:	220-240V (50-60Hz)
Operating temperature:	-25°C /+55°C
Control System:	1-10V optional
Power factor:	> 95
Dimensions:	300 x 8000 x 3200 mm

### Technical drawing

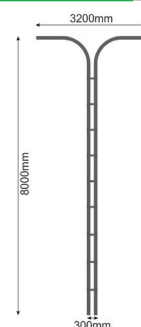

The Leddex Company reserves right to introduce any construction changes and data into the lighting luminaires

