

Giro



Features

- Replacement for Traditional CFL Lmap
- Long lifetime of 50,000 hours
- Dimmable when using triac dimmer
- 120° wide beam angle
- CCT: 3000K 4000K 5000K 5700K
- Environment friendly
- IP54 for indoor use
- Daylight & Microwave Sensor Function


Applications

Suitable for commercial and residential applications like:
 Office
 Supermarket
 Shop
 School
 Hotel
 Restaurant
 Workshop
 Warehouse
 Home etc.

Technical specifications

LEDChip							SMD
Wattage							12W 18W 25W 30W
BeamAngle							120 °
CCT							3000K 4000K 5000K 5700K
Lumens(±5%)	1150-1200lm	1130-1200lm	1160-1230lm	1790-1900lm	1820-1920lm	2400-2560lm	2520-2670lm
	2430-2550lm		2440-2580lm	2430-2550lm	2490-2610lm	2830-3020lm	2950-3160lm
Dimension							Ø250*53mm Ø300*58mm Ø400*66mm

Polar Diagram Comparison

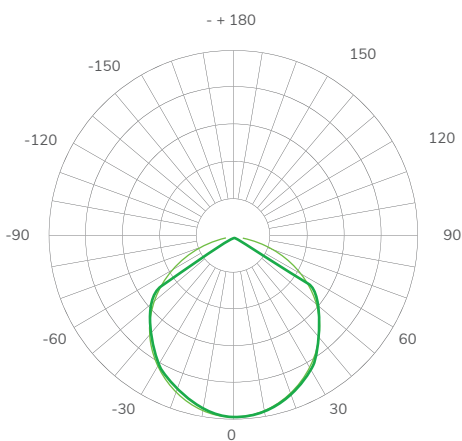

AVERAGE BEAM ANGLE (50%): 113.8 DEG

UNIT: cd

C0/180, 113.8 deg
 C30/210, 113.9 deg
 C60/240, 113.9 deg
 C90/270, 113.8 deg

