

Lungo



Features

- High reliability LED provided by SAMSUNG
- NON Flicker power supply included
- High quality slim aluminum body
- Instant start
- Dali system power supply (optional)
- 0-10V dimming system (optional)
- Colors: White/Black/Silver
- Lighting Down / Up (optional)
- CRI Ra>95 (optional)
- Minimal Lifespan: 50.000hrs
- L80B10 at 25°C
- Linkable to create shapes
- Motion sensor (optional)

Applications

- Rooms lighting
- Hallways lighting
- Offices lighting
- School lighting

Available types


Product Item	Power consumption, W	Color temperature, K	Dimensions, mm
LLL-L-B-30W-4000K	30W	4000K	600mm
LLL-L-W-30W-4000K	30W	4000K	1200mm
LLL-L-40W-4000K	40W	4000K	1200mm

Technical specification


Available colors:	Warm Neutral white optional
Power consumption, W:	20 W 40 W 60 W 80 W optional
LED Type	Epistar /SAMSUNG LED
Milliamps, mA	up to 1050
Dimensions, mm:	600 mm 1200 mm 1800 mm 2400 mm optional
Color rendering index	RA>85 standard RA>95 optional
Unified glare rating	UGR>19/22
LED lifespan	L80B10>50000h



Light curves

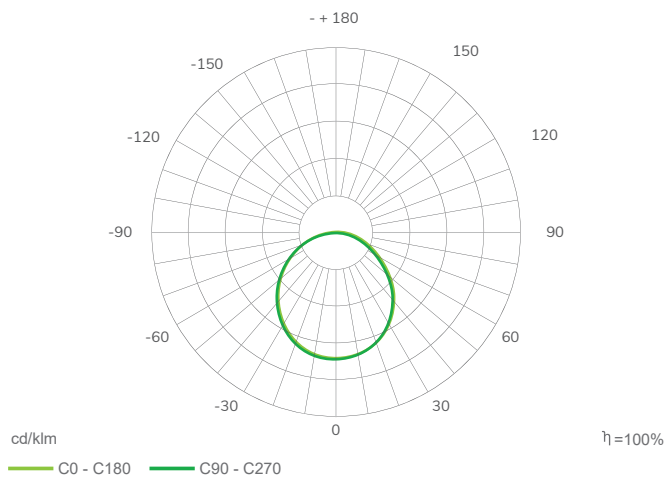

Technical drawing

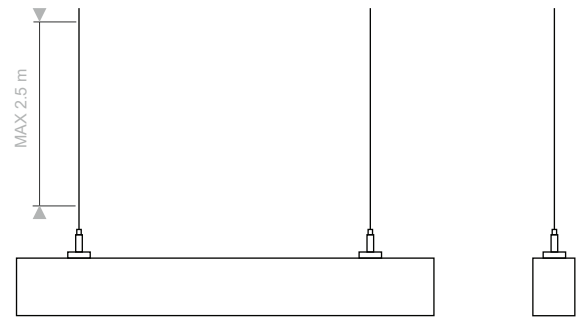

Picture

