

Tondo



Features

- High reliability LEDs by Epistar
- Power supply included
- High quality slim body
- Instant start
- Easy installation


Applications

- Rooms lighting
- Hallways lighting
- Offices lighting
- Warehouses lighting
- Factory lighting


Technical specifications

Available colors	warm white neutral white
Color temperature, K	3000K ±200K 4000K ±200K 6000K ±200K
Power, W	12 W 18 W
Typical luminous flux, lm	874Lm 960Lm 1310Lm 1440Lm
LED Type	Epistar LED
Protection class	IP44

Light curves

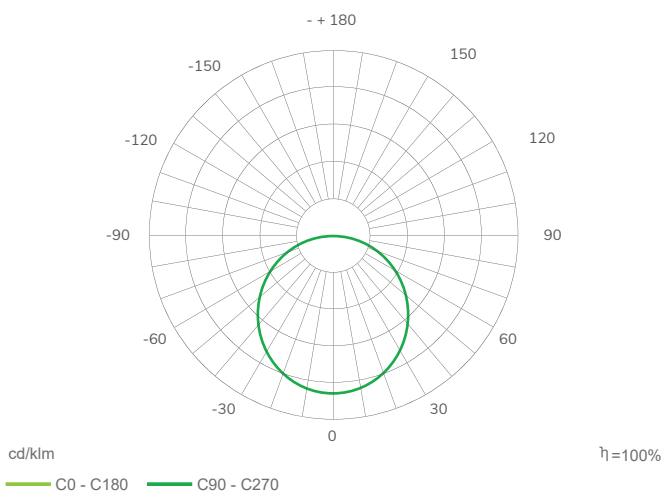

Technical drawing

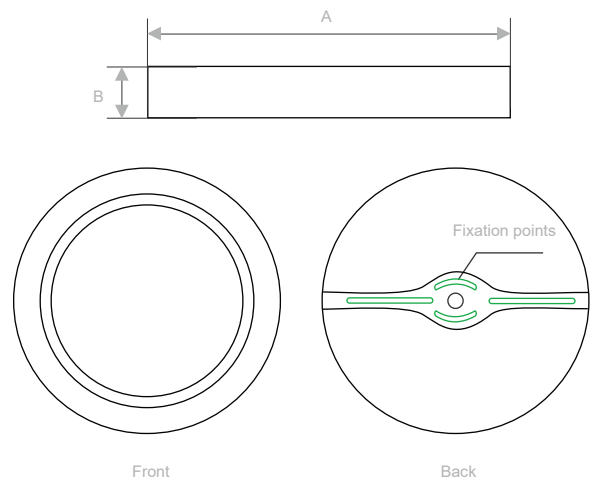

Dimensions

Power	A	B	Typical luminous flux, lm
12 W	ø170	40 mm	874Lm 960Lm
18 W	ø225	40 mm	1310Lm 1440Lm



Other picture

